

SANDELL'S STANDARD SCREWS

Product Name:
Sandell's Standard Drill Screws


Description:
Fastener with self-drilling point and self-tapping thread. This product permits horizontal and vertical movement of the masonry wall while restraining the wall from moving laterally out of its plane. Conforms to ASTM C 954.

Characteristics:
Corrosion-resistant polymer coating conforms to ASTM B 117 (1,000 hours). Self drilling point and self tapping threads ensuring reliability and consistency.

- Available In:**
- ❖ Corrosion-resistant Polymer Coating
 - ❖ Stainless Steel

Applications:
Can be installed with standard drive tools. Recommended for use in conjunction with Sandell's Veneer Anchors.

TECHNICAL ASSISTANCE:
Call Sandell directly for technical assistance or product questions:
New York: 800.283.3888
Alabama: 877.726-3355
Wisconsin: 800.323-3565
 www.sandellmfg.com

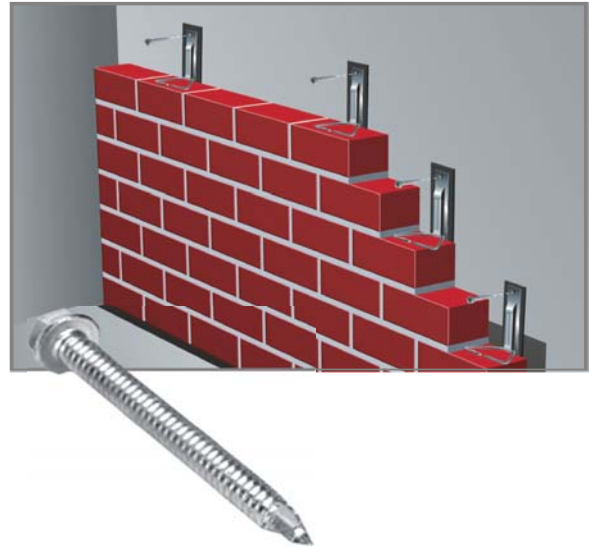

Finish:
 Polymer Coated Stainless Steel

Head Size:
 #10 #12

Length:
 1½" 2" 3" 4" 5"

Other Options:
 With Washer Without Washer

Revised 08.05.09

Amendments / Notes:

Sandell Employee:

Date:

CORPORATE OFFICE
NEW YORK
Toll Free: 800-283-3888
Fax: 518-357-9757

BRANCH OFFICE
ALABAMA
Toll Free: 877-SANDELL
Fax: 205-263-1033

BRANCH OFFICE
WISCONSIN
Toll Free: 800-323-3565
Fax: 414-764-6993